


Saturn CA87 Datasheet

Specifications:

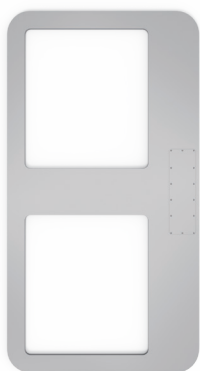

**Saturn
Floor Antenna
CA87**

Product code: CA87

Fuse of PSU: 2.0A

Size: CA87-1640: L1640×W870×T20mm
(L65"×W34"×T0.78")

CA87-1840: L1840×W870×T20mm
(L73"×W34"×T0.78")


CA87-2100: L2100×W870×T20mm
(L83"×W34"×T0.78")

Weight: CA87-1640: 21.5 kg (47.4 lb);
CA87-1840: 25 kg (55.1 lb);
CA87-2100: 29 kg (63.9 lb)

Material: PVC

Alarm Volume: 0-130dB

Main Application: Fashion Stores

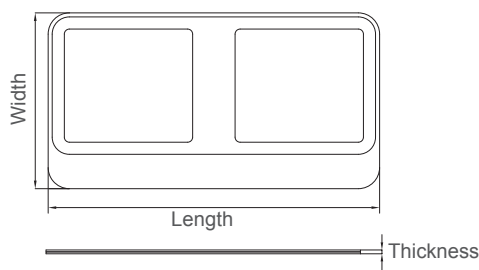

Saturn controller

Product code: CAB65

Central Frequency: 58KHz


Power consumption: 44W

Fuse of PSU: 2A

Voltage: 110/220V

Size: L461.5×W290×T102mm
(L1.42"×W0.95"×T0.33")

Weight: 9kg

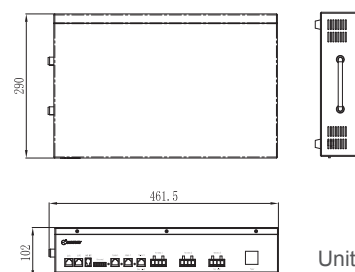


Units: mm

Product Codes:

Name	Code	Description
Saturn Floor antenna	CA87	Works with controller
Saturn controller	CAB65	One controller can work with one or two floor antennas

System Configurations:

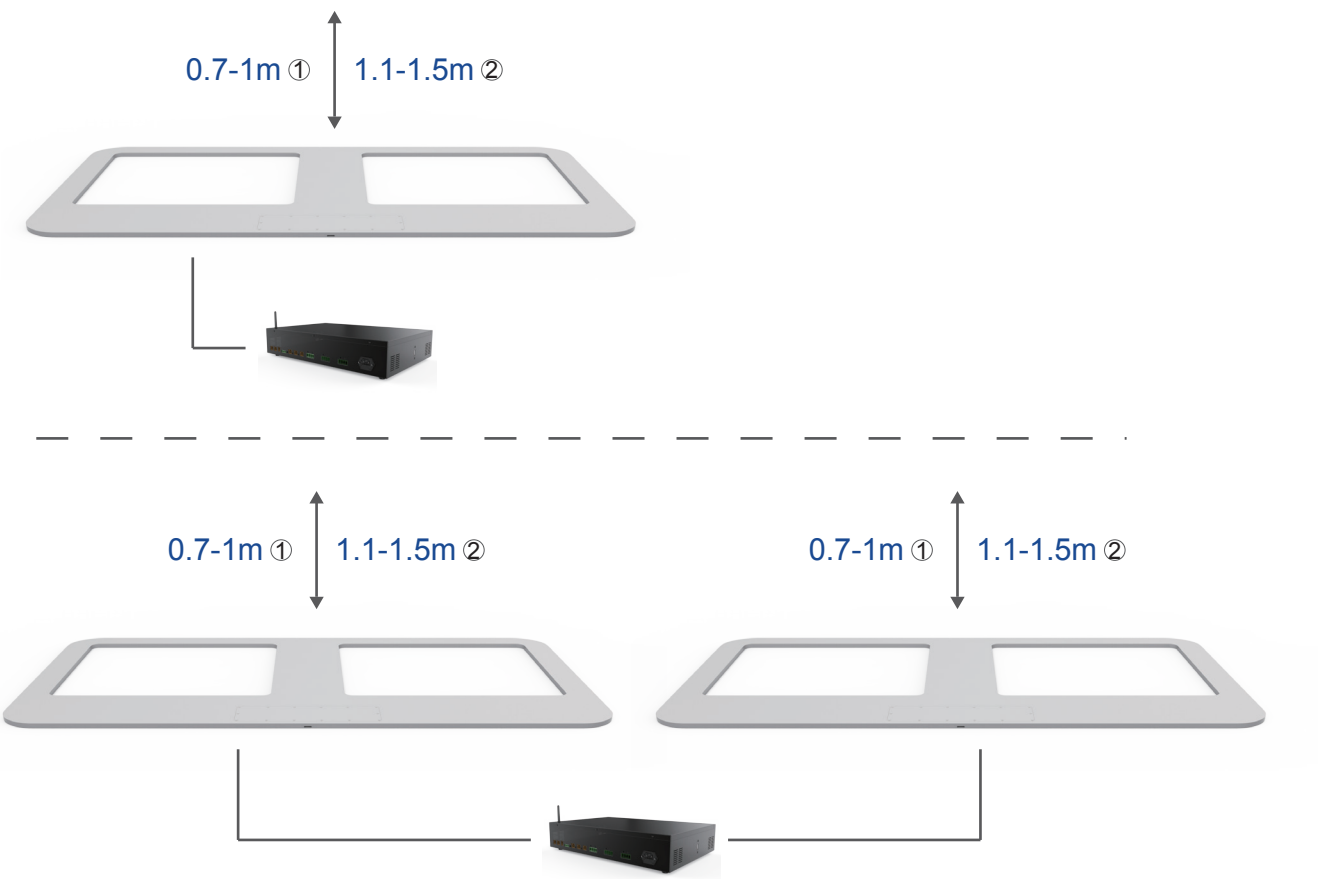

Product Code	Detection Width		Detection Height	
	Measured with AM label ①	Measured with AM hard tag ②	Measured with AM label ①	Measured with AM hard tag ②
CA87-1640	1.6m		0.7-1m	1.1-1.5m
CA87-1840	1.8m			
CA87-2100	2.1m			

① Measured with AM label
 ② Measured with AM hard tag